


# Wall Mounting Stainless Steel Enclosures



IP 65 (IEC 529)

SS304/SS316



- Made of stainless steel, surface hairline finished. Grade SS304/316.
- Complete with mounting plate (galvanised steel), bottom gland plate and plastic lock.
- Enclosure body folded and welded from single piece material for maximum protection.
- Double folded gutter at door frame to increase rigidity and prevents water from entering while door is opened.
- A continuous seal of polyurethane gasket at door provides high IP protection.
- Conceal hinges provide 120° door opening.
- Earthing facilities on body, door and mounting plate.
- Material Specification.
  - Body & door - 1.5 to 2.0mm SS304/316
  - Mounting plate - 1.5 to 2.0mm galvanised steel
  - Canopy & rainhood - 1.5mm SS304/316
  - Wall mounting bracket - 2.0 to 3.0mm SS304/316



SIRIM  
Certified to: MS IEC 60529: 2005  
Certification No.: LC028801



CERT NO. KLR 0403479

# IP 65 (IEC 529)

## Wall Mounting Stainless Steel Enclosures

Item	Model	Dimension (mm) Height x Width x Depth	Mounting Plate	Nos. of Lock	Gland Hole	Canopy	Inner Door	Transp. Door	Rain Hood	Modular Chassis
1	CRX 252015	250 x 200 x 150	214 x 150	1	0	•				
2	CRX 302515	300 x 250 x 150	264 x 200	1	174 x 60 x 1 no.	•		•		•
3	CRX 303015	300 x 300 x 150	264 x 250	1	174 x 60 x 1 no.	•		•		
4	CRX 403015	400 x 300 x 150	364 x 250	1	174 x 60 x 1 no.	•		•		•
5	CRX 403020	400 x 300 x 200	364 x 250	1	174 x 60 x 1 no.	•	•	•	•	•
6	CRX 404020	400 x 400 x 200	364 x 350	1	259 x 88 x 1 no.	•	•	•	•	
7	CRX 504020	500 x 400 x 200	464 x 350	2	259 x 88 x 1 no.	•	•	•	•	•
8	CRX 604020	600 x 400 x 200	564 x 350	2	259 x 88 x 1 no.	•	•	•	•	•
9	CRX 606025	600 x 600 x 250	564 x 550	2	310 x 115 x 1 no.	•	•	•	•	
10	CRX 705025	700 x 500 x 250	664 x 450	2	310 x 115 x 1 no.	•	•	•	•	
11	CRX 806025	800 x 600 x 250	764 x 550	2	310 x 115 x 1 no.	•	•	•	•	
12	CRX 806030	800 x 600 x 300	764 x 550	2	310 x 115 x 1 no.	•	•	•	•	
13	CRX 808030	800 x 800 x 300	764 x 750	2	310 x 115 x 2 no.	•	•	•	•	
14	CRX 1008030	1000 x 800 x 300	964 x 750	2	310 x 115 x 2 no.	•	•	•	•	
15	CRX 1208030	1200 x 800 x 300	1164 x 750	2	310 x 115 x 2 no.	•	•	•	•	

Model CRX - SS304, Model CRXX - SS316

\* All dimension in mm


### Optional Items



Canopy (Top) and Rain Hood (SS304/316)



Wall mounting bracket (SS304/316)

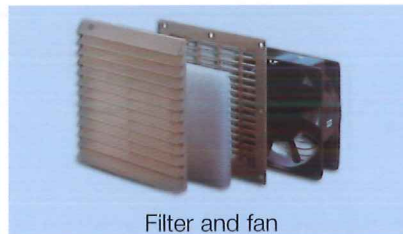

Filter and fan



Inner Door (SS304)




Transparent Door (SS304/316)



Die cast quarter turn lock




Metal cam lock with keys

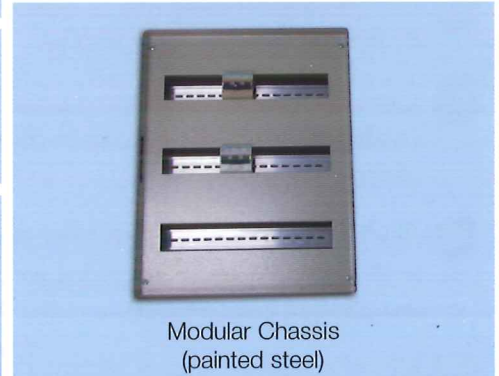

Modular Chassis  
(painted steel)

Manufacturer:-  
**CVS METAL INDUSTRIES SDN. BHD.** (173532A)  
 No. 1, Jalan BK 1/14, Bandar Kinrara,  
 47180, Puchong, Selangor, Malaysia.  
 Tel: 603-8070 5279/1960 Fax: 603-8070 3920  
 Website: [www.cvs.com.my](http://www.cvs.com.my) ;  
[www.cvsenclosure.com](http://www.cvsenclosure.com)  
 E-mail: [office@cvs.com.my](mailto:office@cvs.com.my)

Please contact your nearest supplier

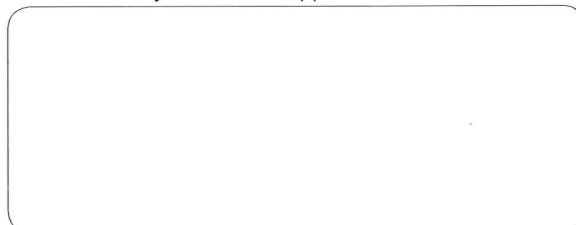

We reserve the right to alter product design and specifications without prior notice.



SIRIM  
 Certified to: MS IEC 60529:2005  
 Certification No.: LC020801



CERT NO. KLR 0403479